



ISY-99i Series Quick Setup Guide

1. ISY Installation

1. Connect one of the included Cat5e cable to ISY's **Network Port** and to your network hub. **Note:** the network must *initially* be DHCP enabled. If DHCP is not enabled, please consult ISY Advanced Configuration Guide at <http://www.universal-devices.com/resources.htm>
2. Connect the second included Cat5e cable to ISY's **Port A** and the other end to the PLM
Note: If your PLM is model number **2413S**, you do need a power supply (not included)

2. Host Computer Configuration

1. If you do not have Java installed, please install the latest for your platform. You may find the latest Java downloads at <http://java.sun.com/javase/downloads/index.jsp>. Please choose the latest JRE for your platform
2. Start a Web Browser of your choice and go to <http://www.universal-devices.com/99i> ; when prompted to authenticate, enter **admin** for both user-id and password
3. If you would like to access your ISY without a browser, please go to <http://www.universal-devices.com/99i/admin.jnlp>
4. On Universal Devices Administrative Console, choose **Help -> About** (Figure 2A)
5. On the About Dialog, locate **My URL** and write down the URL. For example, in Figure 2B, the URL is <http://192.168.1.99>. You may also access your ISY using this URL (as long as your router does not change the address for ISY)

Note: If you have Windows XP, Vista, or Windows 7 and if you have UPnP (XP)/Device Discovery (Vista) enabled on your computer, you will see a **My Lighting** icon appear in My Network Places (XP) or Network (Vista/Windows 7).

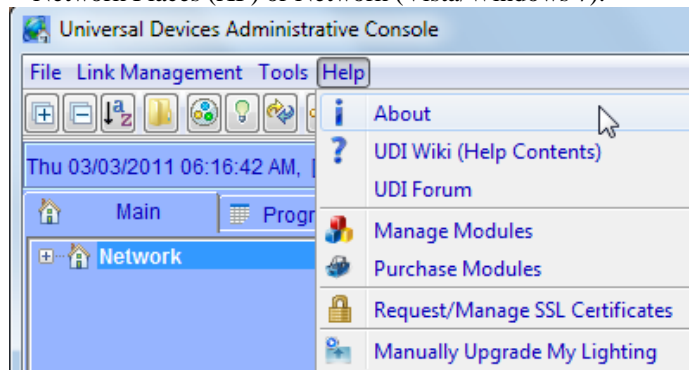


Figure 2A

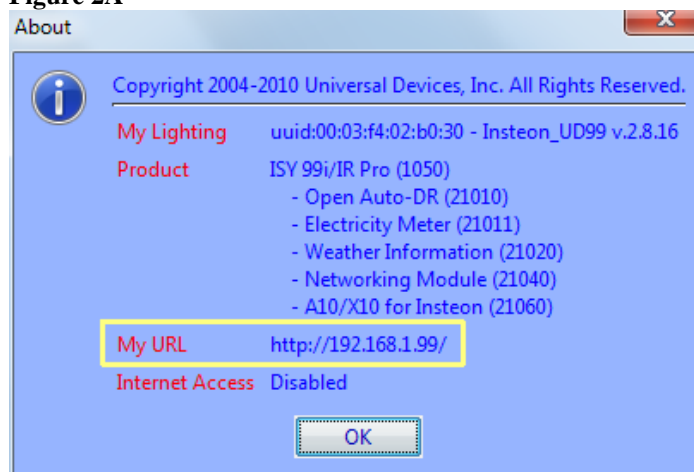


Figure 2B

3. Final Steps

Set Time and Location

Click on the **Configuration** tab and set the Time and the Physical Location for the unit (used for Sunrise/Sunset calculations). See Figure 3A.

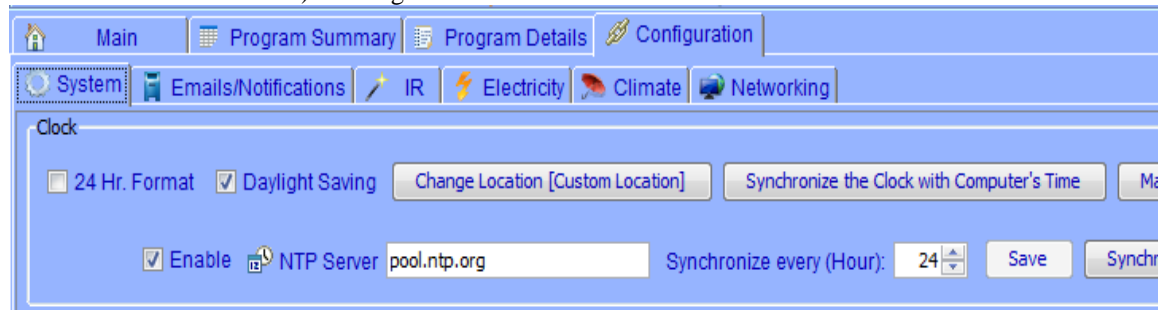


Figure 3A

Check the Programs

Click on the **Program Details** tab will see a **QueryAll** program for the purpose of querying the unit. Please choose a time when the system is not used (i.e. 3:00 a.m.). See Figure 3B.

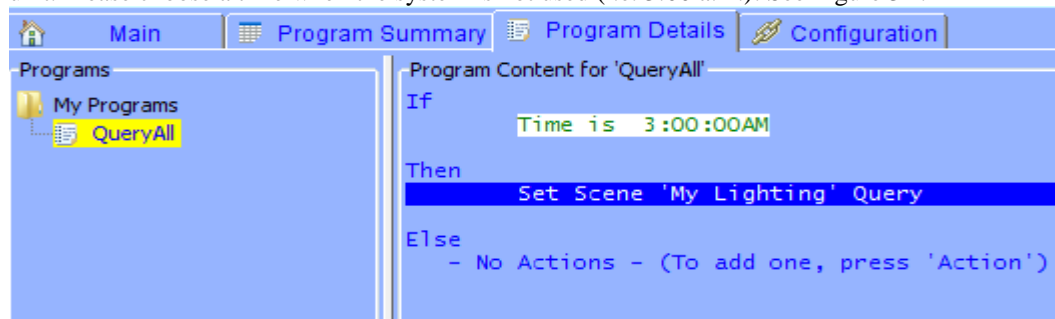


Figure 3B

Start Linking Your INSTEON Devices!

Click on the  icon and *then follow the instructions on the screen*. Continue linking as many devices as desired before clicking on the Finish button. See Figure 3C.

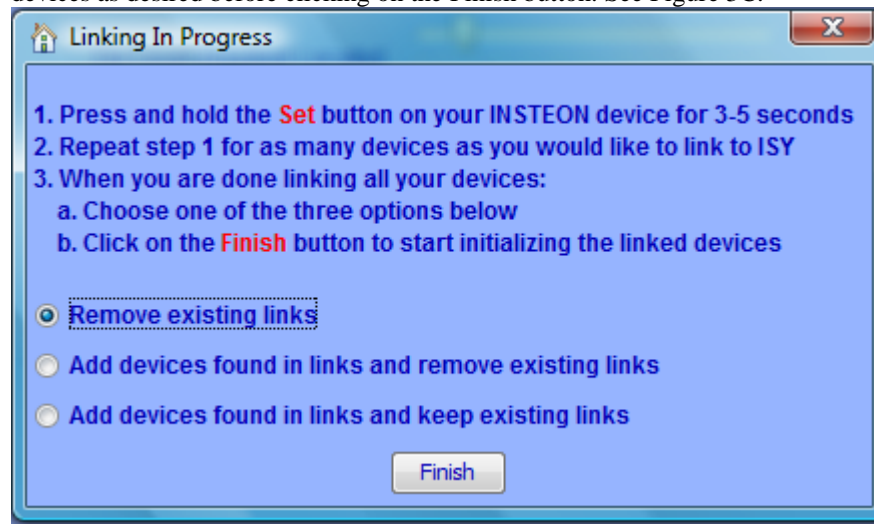


Figure 3C

For additional documentation, please visit <http://www.universal-devices.com/mwiki>
Don't forget to register your unit to receive important enhancements, updates and upgrade information: <http://www.universal-devices.com/register>

ENJOY!